


AEROSENSE

Elderly Home Care System

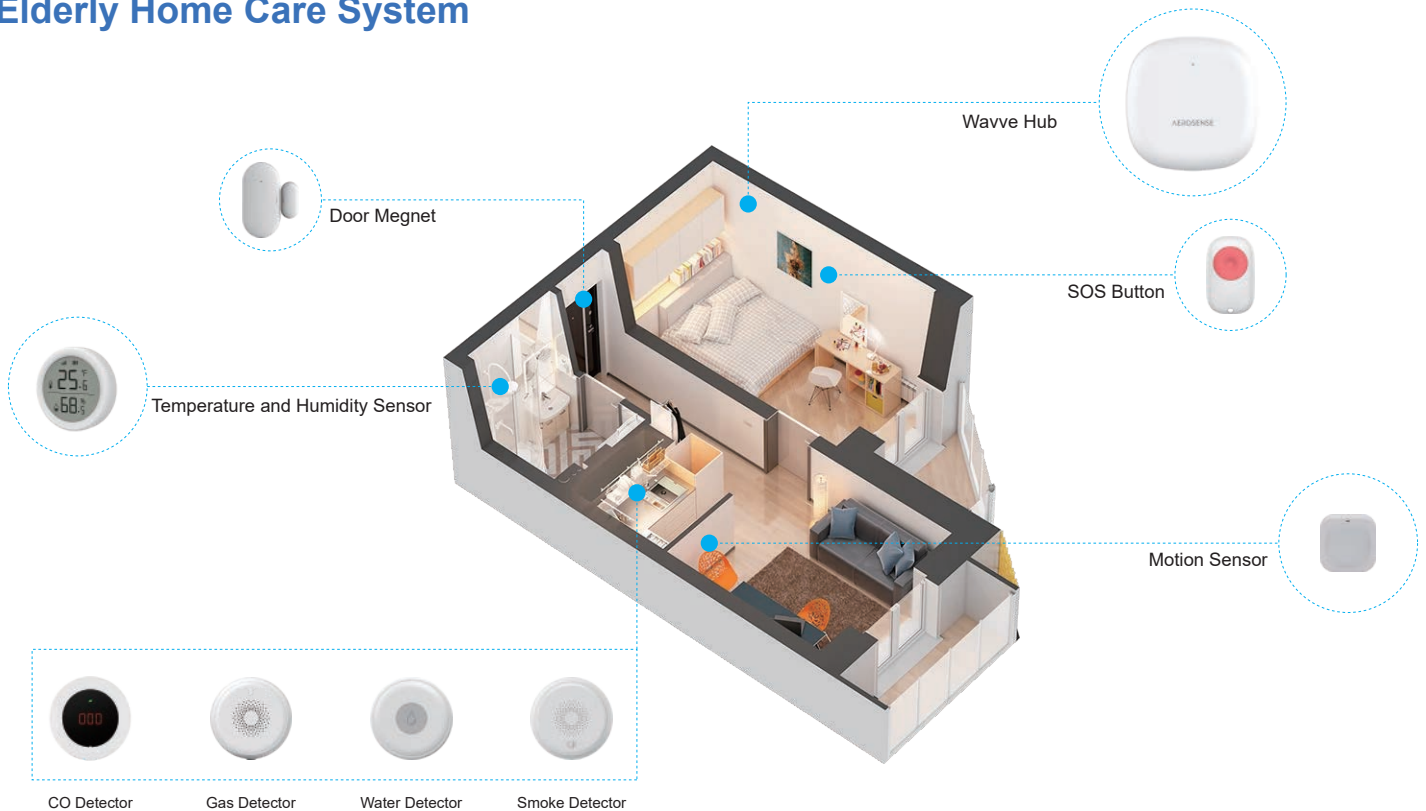

A smart remote and contactless monitoring system to for a safer home for your loved ones.

MM wave radar technology for bio-vital and sleep monitoring.

Activity report with analytic data and trends.

Accessories including door magnets, PIR motion sensors, SOS buttons and more.



NO CAMERAS



24/7 SAFETY & SECURITY



SMART ALERTS



PLUG & PLAY



Sleep Report

Sleep quality report and trend analysis.



Vital signs detection

Respiratory and heart rate signals.



Activity Report

Activity reports generated based on feedback of various sensors.



Oversleeping Alert

Active alerts if the user is still in bed longer than their normal schedule.



Wandering Alert

Active alerts warn if the user is away from the bed longer than expected.



Motion Detector

Smart PIR Motion Detection and alerts.



SOS

Button/Pull cord Alarm and alerts.



Gas Detector

Smart gas detection and alerts.



CO Detector

Smart CO detection and alerts.



Smoke Detector

Smart smoke detection and alerts.

SPECIFICATIONS

*Appearances and specifications may be subject to change without notice.

Aerosense Wavve Hub

Model	AASW-1H
Detection range	0.5 ~ 1.5 (m) / 1.64 ~ 4.92 (ft)
Power Input	DC 5V / 1A Max
WiFi	2.4G WiFi
Communication Interface	Zigbee 3.0

Door Megnet

Model	AASX-1MC
Communication Interface	2.4G Zigbee
Voltage Rating	DC 3V (CR2032 battery)
Transmitting Distance	80(m) / 262(ft) open area

Temperature and Humidity Sensor

Model	AASX-1HT
Communication interface	2.4G Zigbee
Transmitting distance	262 (ft) open area
Power supply	3V (battery)
Working temperature/humidity	-4 ~ 140 (°F) / 0~99.9% RH

Smoke Detector

Model	AASX-1SM
Communication Interface	2.4G Zigbee
Voltage Rating	DC 3V (CR123A battery)
Volume	80dB

Water Detector

Model	AASX-1WA
Communication Interface	2.4G Zigbee
Voltage Rating	DC 3V (CR2032 battery)

Motion Sensor

Model	AASX-IR600 (pet immunity)
Effective Detection Range	Maximum detection range: 32.8 (ft) Typical detection range: 22.9 (ft)
Detection Angle	90°
Communication interface	2.4G Zigbee
Power supply	DC 3V(CR2450 battery)
Installation height	7.2 (ft)

SOS Button

Model	AASX-1SO
Communication Interface	2.4G Zigbee
Voltage Rating	DC 3V (CR2032 battery)
Transmitting Distance	80(m) / 262(ft) open area

CO Detector

Model	AASX-1CO
Communication Interface	2.4G Zigbee
Voltage Rating	DC 12V
CO Range	0ppm ~ 500ppm
Alarm LEL	200ppm ± 50ppm
Volume	70dB

Gas Detector

Model	AASX-1GS
Voltage Rating	DC 12V ≤200mA
Volume	70dB
Detected Gas	Methane
Alarm LEL	8% LEL Methane